



ZHEJIANG A-CRYSTAL
ELECTRONIC TECHNOLOGY CO., LTD.



Issue	June 13, 2023
Rev.	1.0
Page	9

CRYSTAL UNIT SPECIFICATIONS

客户批准 Customer Approval

(请批准后回签一份 Please Return A Copy With Approval)

Customer	
Customer P/N	
Product	CRYSTAL RESONATORS
Spec	P7SB/6.000~100.000MHz
A-Crystal P/N	AP7 Series

Drawn	Checked	Approved
<i>caogaobang</i>	<i>tanglong</i>	<i>huangweilong</i>



ZHEJIANG A-CRYSTAL

ELECTRONIC TECHNOLOGY CO., LTD.



1. ELECTRICAL SPECIFICATIONS

1.1 Hold Type: P7SB


No.	Item	Symb	Electrical Specification				Remark
			Min.	Type	Max.	Units	
1	Nominal Frequency	F0	6.000		100.00	MHz	
2	Mode of Vibration		■ Fundamental △3rd Overtone △5th Overtone				
3	Frequency Tolerance	$\Delta F/F0$	± 10	± 30	± 50	ppm	at 25°C±3°C
4	Operating Temperature Range	T _{OPR}	-20 -40	-	+70 +85	°C	
5	Frequency Stability	T _C	± 30		± 50	ppm	
6	Storage Temperature	T _{STG}	-55	-	+125	°C	
7	Load capacitance	CL	6~specify			pF	
8	Equivalent Series Resistance	ESR	Seepage 1			Ω	
9	Drive Level	DL	-	100	300	μW	
10	Insulation Resistance	IR	500	-	-	MΩ	At 100V _{DC}
11	Shunt Capacitance	Co			7	pF	
12	Aging Per Year	Fa	-3	-	+3	ppm	First Yea
13	Moist are Sensitivity Level	MSL		1			J-STD-033
14	Package type	7.0*5.0*1.1					

Seepage1


Frequency Range(MHz)	Mode of Vibration	ESR(Ω) Max
6.000<F0<8.000	AT Fundamental	≤ 120
8.000<F0<12.000	AT Fundamental	≤ 100
12.000≤F0<16.000	AT Fundamental	≤ 60
16.000≤F0<40.000	AT Fundamental	≤ 40
40.000≤F0<100.000	3 rd Overtone	≤ 70



1.2 Dimension (Unit: mm)

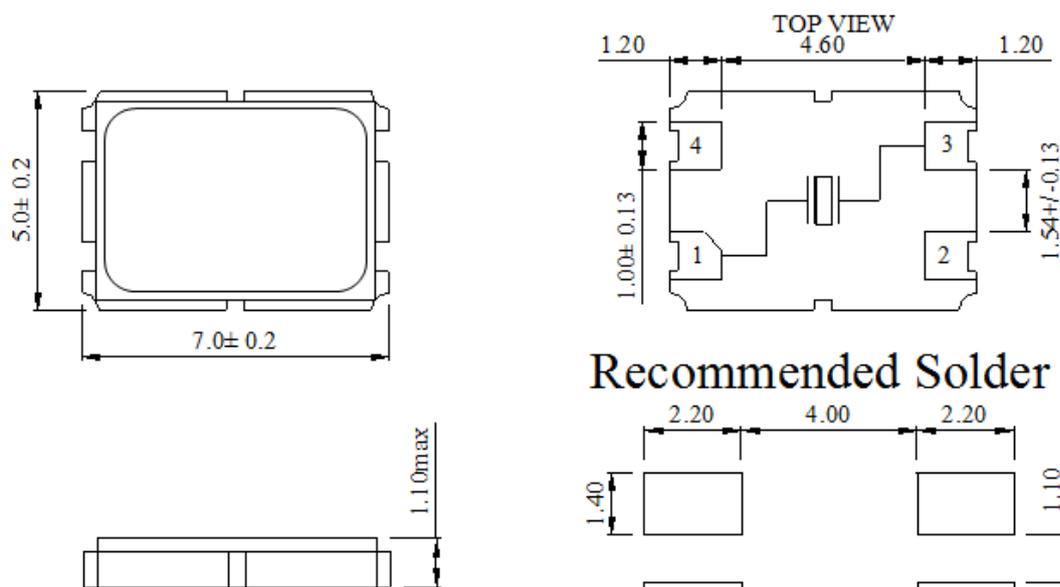


1.3 Marking

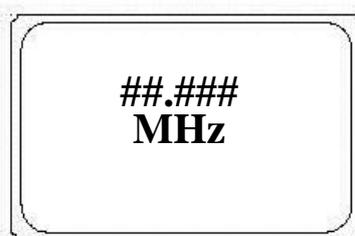




1.4 Reflow solder

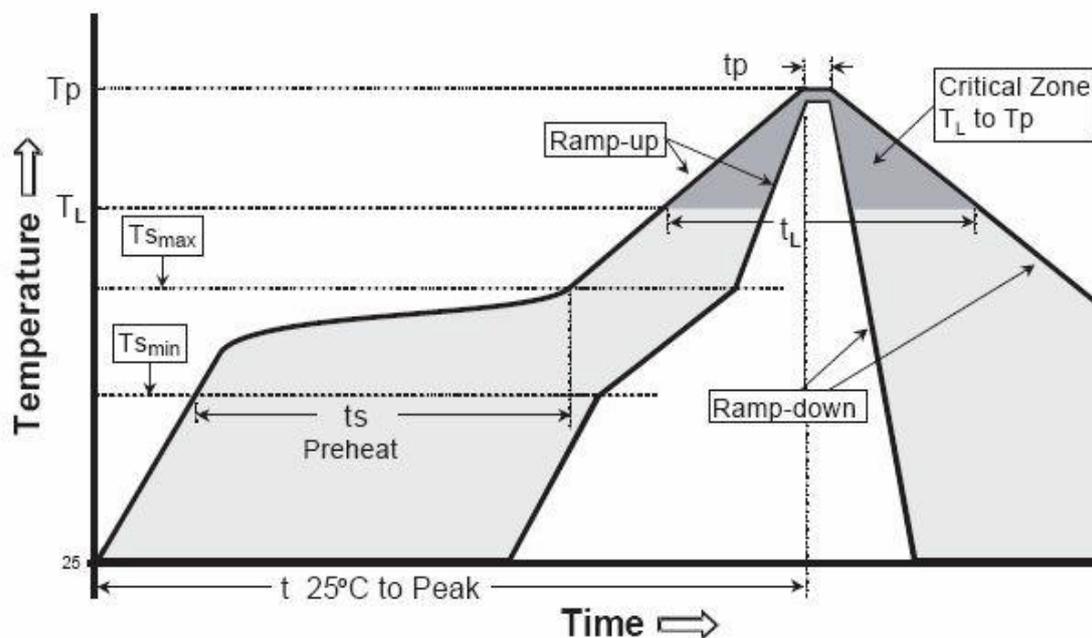

$T_s = 200^{\circ}\text{C}/60 \sim 180\text{sec}$, $T_L = 217^{\circ}\text{C}/60 \sim 150\text{sec}$, $T_p = 260^{\circ}\text{C}/20 \sim 40\text{sec}$

2. Packing


2.1 Packing Method Sketch Map (Unit: mm)

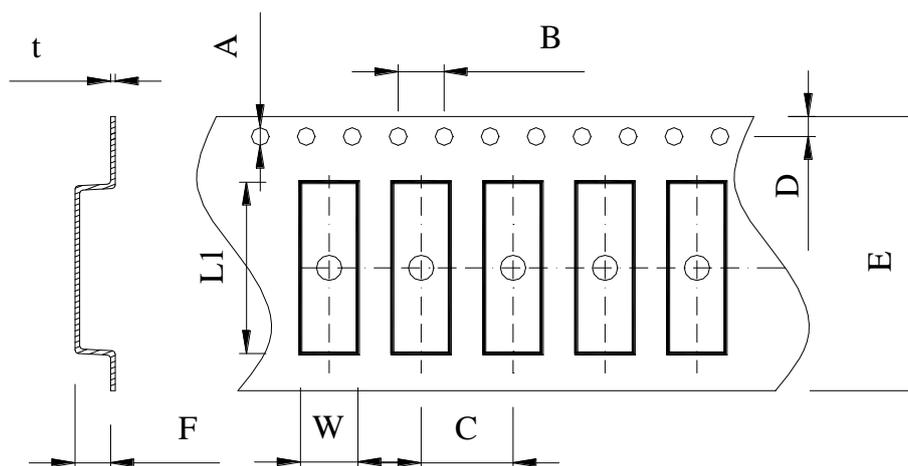

A	B	C	D	E	F	L1	W	t
1.50	4.0	8.0	1.75	16.0	1.6	7.5	5.4	0.3



2.2 Reel Dimensions (Unit: mm)

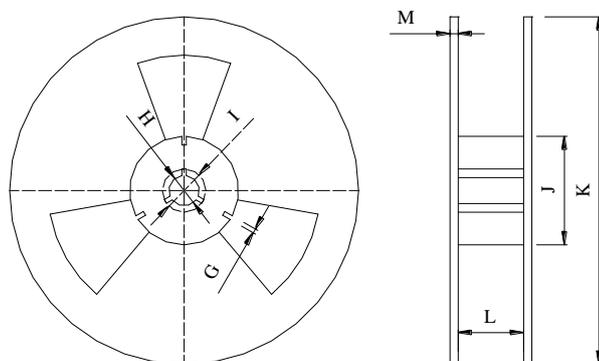

G	H	I	J	K	L	M
2.5	13.5	21.6	80.0	180	17.5	1.6

Pieces per reel: 1000/reel

3. Products Code

3.1 SMD Crystal Resonators/MHz

公司代码 浙江一晶	产品型号 (2位)	工作频率 (全频点位数)	负载电容 (1位字母)	调整频差 (1位字母)	温度频差 (1位字母)	工作温度 (1位字母)	其它
A-crystal Logo	Package	Nominal Frequency	Load Capacitance	Frequency Tolerating	Freq Temp Characteristics	Operating Temperature Range	Others
A	P7 (P7SB)	24.000M	A = 12.5PF	A=10PPM	A=10PPM	A = 0~50	Special
		32.000M	B = 10PF	B=20PPM	B=20PPM	B = -10~60	
			C = 9PF	C=30PPM	C=30PPM	C = -10~70	
			D = 8PF	D=50PPM	D=50PPM	D = -20~70	
			E = 7PF	E=100PPM	E=100PPM	E = -30~85	
			F = 6PF			F = -40~85	
			G = 16PF			G = -40~105	
			H = 18PF			H = -40~125	
			J = 20PF				
			K = 22PF				
			L = 30PF				